



ZEPHIRO

TEKNOVIND


INDEX:

Model Description	Pag. 3
Measurements	Pag. 4
Packaging	Pag. 4
Installing system	Pag. 5
Wall mounting plate	Pag. 5
Customization	Pag. 5
Materials	Pag. 6
Canopies	Pag. 6
Slats	Pag. 7
Structure and plate	Pag. 8
Plastics	Pag. 9
Assembly	Pag. 10
Instructions for disassembling the canopy	Pag. 11
Warnings	Pag. 12
Warranty	Pag. 12
Contacts	Pag. 12




ZEPHIRO


Wall-mounted parasol with six ribs; it is lightweight, user-friendly, and above all safe as it withstands winds of up to 90 KM/h. It is ideal for safely furnishing outdoor spaces such as terraces, spaces dedicated to catering, public areas managed by bars and particularly windy locations. It allows for the creation of fully usable shaded areas thanks to the absence of bases.




Zephiro 220 and Zephiro 275 can withstand winds of up to 90 km/h if the installing instructions are followed.




- Available in sizes 220 cm and 275 cm
- Hexagonal shape



- Hanging parasol




- Stainless steel slats

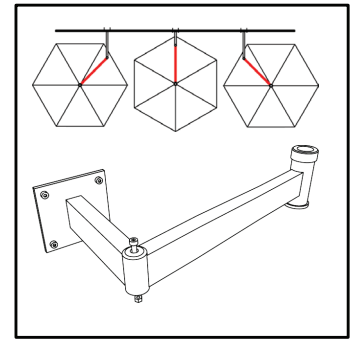


- Rotation of the arm to 180 °



- 100% mass-dyed acrylic fabric



- Projected shadow:
3,3 sqm for the 220 model
5,2 sqm for the 275 model

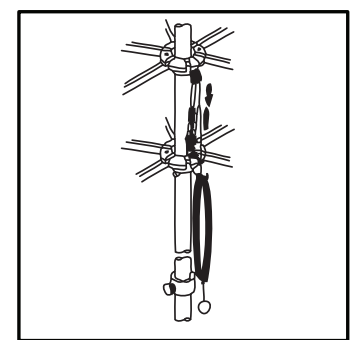

- Manual opening/closing system with double pulley







OPTIONAL:

- PVC antifreeze case
- Remote control battery LED
- Customization of the covers with the name and logo of the company

GOOD TO KNOW:

- Customized designs
- Designed and manufactured in Italy
- Proprietary Teknowind patent
- Spare parts available
- 2 years warranty
- Tested at the University of Perugia

MEASUREMENTS:

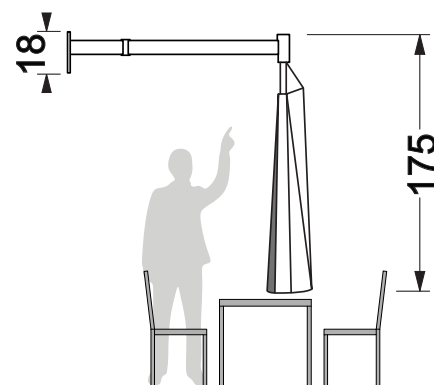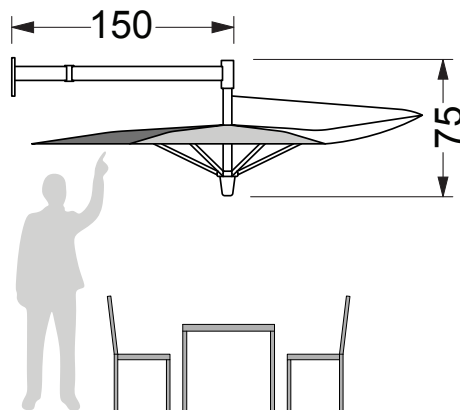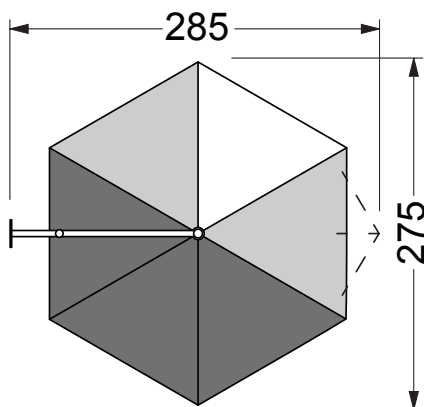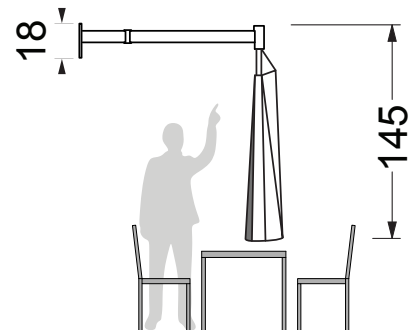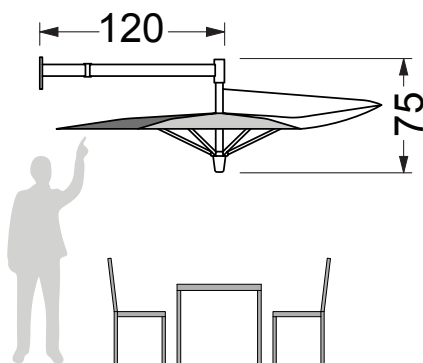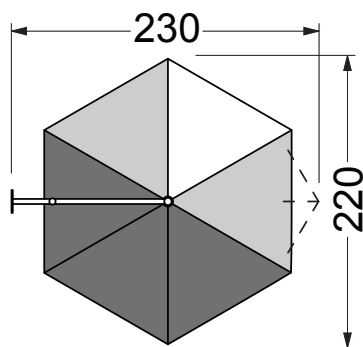


PACKAGING:

On request, the parasol is delivered in a special cardboard made packaging.
Dimensions: 30 x 30 x 190 Cm


Weight 220: 9 Kg
Weight 275: 11 Kg

This package does not contain the bases, which are shipped separately.


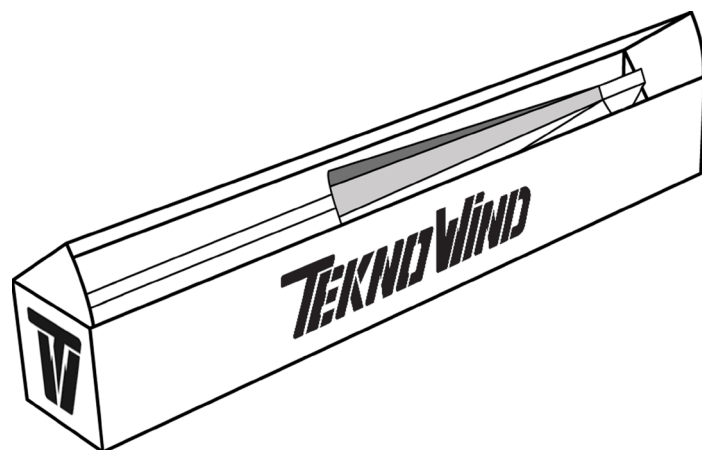


INSTALLING SYSTEM:

WALL MOUNTING PLATE:

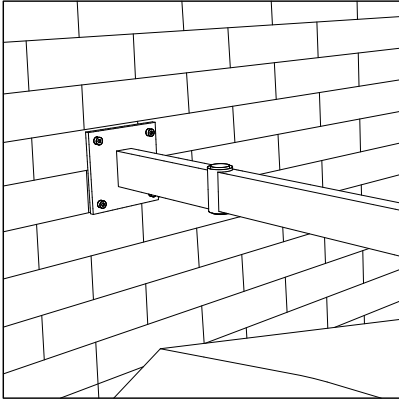

Our Zephiro model comes with a 200 x 200 mm and 8 mm thick galvanized iron plate, painted the same color as the structure. It is the “special” anchoring system of the Teknowind collection; thanks to holes in the corners, it can be wall-mounted with four threaded rods or with four dowels.

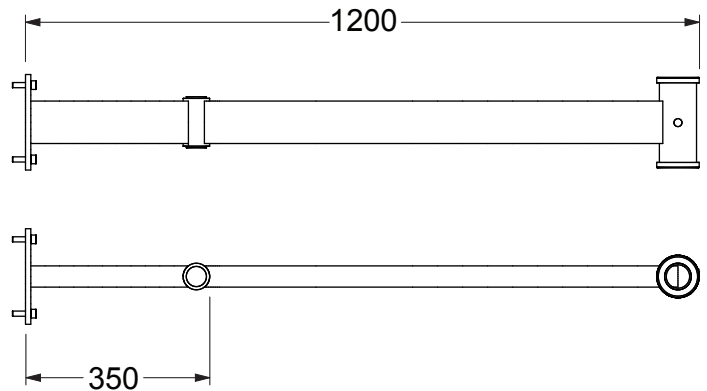


CUSTOMIZATION:

Upon request, our wall-mounting systems may be customized.
(Minimum order quantity required)



MATERIALS:

CANOPIES:

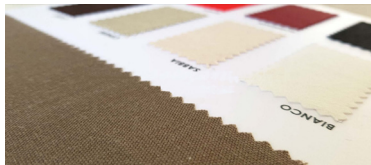

The canopies are exclusively manufactured from the highest quality fabrics 100% made in Italy.

Experience gained in the parasol sector has determined the choice of fabrics used: Acrilmare® and Acrilgiardino® are made from mass-dyed acrylic fiber and are the best on the market thanks to their absolutely

unique quality and weatherproof properties.

Both textiles are characterized by a high degree of color fastness to ensure that the parasols always look new year after year. Prolonged exposure to ultraviolet rays, iodine and salt water will no longer be a problem.

- 100% DOLAN® paste-dyed acrylic fiber
- Weight: 295 g/sqm
- Maximum UV protection: protects your skin by blocking over 97% of UV rays
- Optimum color resistance to direct light
- Color resistance to rubbing
- Swimming pool water resistance
- Dustproof, stain proof, anti-mould, antibacterial, water and oil repellent treatment
- Highest resistance to traction, laceration and tearing
- 100% Made in Italy



MAINTENANCE:

Avoid extended contact with oily substances and/or dyes that could be absorbed by the fabric and cause permanent stains, as well as deteriorating the structure of the textile. If used in proximity to the sea or swimming pools, periodic washing is recommended.

WASHING:

- Wash at 40°C
- Can be washed with bleach
- Iron at low temperatures

- Do not dry clean
- Can be tumble dried at low temperatures
- Dries quickly



COLORS:



TAUPE



WHITE



SAND




ASH



COFFEE



BLACK



BURGUNDY



RED




NAVY BLUE



GRAY

Colors may vary slightly. Please refer to the actual fabric before choosing.

SLATS:

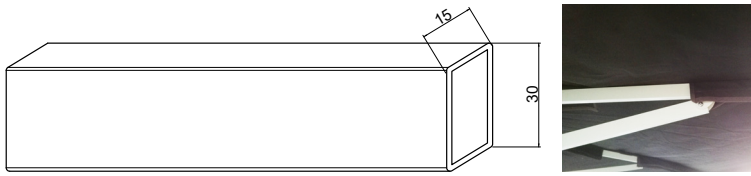

The slats and crossbars consist of 15 x 20 mm stainless tubes, 1,5 mm thick, powder coated.

MAINTENANCE:

To keep the product in good condition for a long time, we recommend proper periodic cleaning, especially in locations with high humidity and marine climate. We recommend wiping surfaces with a soft cloth using water or mild detergents. Prolonged and uninterrupted exposure to intense UV radiation or very cold temperatures can affect the properties of the coating. We recommend cleaning the products well and storing them in sheltered places during extended periods of non-use or during winter.

PAINTING:


When painting stainless steel, Teknowind relies on experts in the field.

Powder coating is the most suitable treatment for outdoor furniture, as it has significant advantages over traditional liquid coating.

Thanks to the powder coating process, the surface is protected against corrosion and against chemical agents.

The process involves depositing through the action of an electrostatic field, thermosetting resins that are then melted and polymerized in special ovens in order to create a protective/decorative film.

In powder coating, the resins, which do not adhere to the treated surface and are dispersed into the coating environment, are recovered and reused, thus resulting in low pollution.

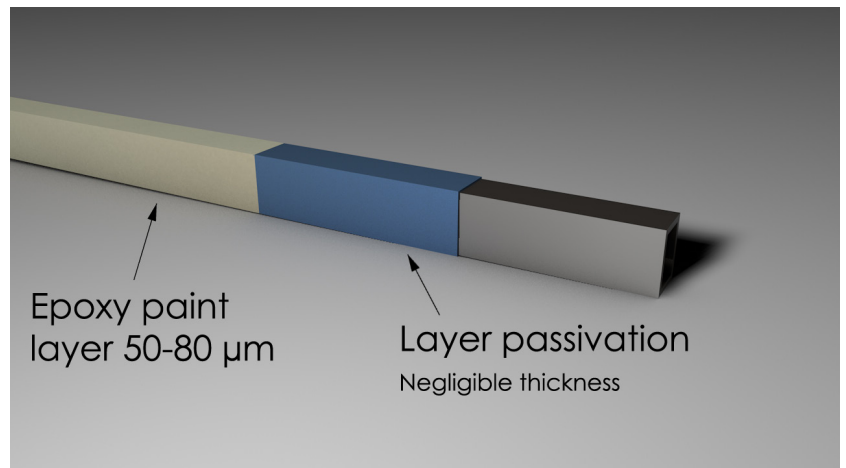

COLORS:



WHITE



IVORY



INDIAN BROWN



CHARCOAL GRAY



BLACK

Colors may vary slightly. Please refer to the actual painting before choosing.

STRUCTURE AND PLATE:



The structure of the wall-mounted parasol, including the jointed cantilever and plate, is entirely made of steel.

MAINTENANCE:

In order to keep the product in good condition for a long time, we recommend storing it during winter in closed and dry places so as to avoid condensation. Before the winter season and every three months, if the products are stored close to the sea, it is recommended to clean the metal surfaces with a soft cloth using water or detergents and protect them with Vaseline oil or car wax.


TREATMENTS:

All steel parts, prior to painting, are subjected to electrolytic galvanizing to protect them from galvanic corrosion (rust).

The material, before treatment, is pre-greased, pickled (stripped) and degreased. Immediately afterwards, the objects are immersed in an electrolytic solution containing zinc salts.

Eventually, an electrical flow is created between the workpiece and the solution, which deposits the metallic zinc on the surface of the workpiece itself. Once the protective treatment of the steel is completed, the various components are powder coated.

The process involves depositing, through the action of an electrostatic field, thermosetting resins that are subsequently melted and hardened in special ovens in order to create a protective/decorative film. In powder coating, the resins, which do not adhere to the treated surface and are dispersed into the coating environment, are recovered and reused, thus resulting in low pollution.

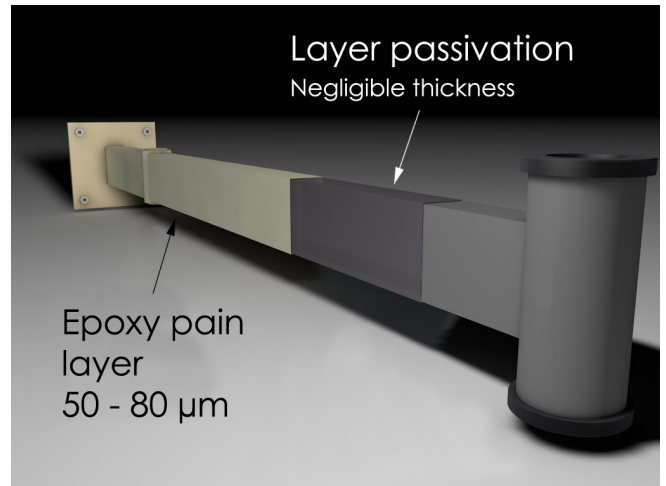

COLORS:



WHITE



IVORY



INDIAN BROWN



CHARCOAL GRAY




BLACK

Colors may vary slightly. Please refer to the actual painting before choosing.

PLASTICS:



All plastic parts used in Ghibli models, including the hubs, are made of black, high-density polyethylene. Polyethylene (HDPE) is a popular material; it possesses high resistance to chemicals and is resistant to water, saline solutions, acids, alkalis, alcohol and gasoline. Due to its resistance to temperatures ranging from - 40°C to + 80°C, UV rays and atmospheric and weather agents, HDPE is perfect for items that are constantly used outdoors. In addition, it has excellent shock resistance, and is extremely lightweight.

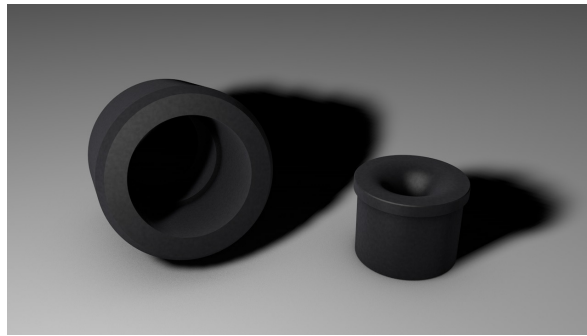

MAINTENANCE:

Polyethylene requires no specific treatment. As for cleaning, simply use water and a mild detergent. Do not use solvents or solvent-based cleaners (avoid acetone). If necessary, allow the detergent to work for a few minutes. Rinse thoroughly with water.

ASSEMBLY:



Two operators are required








Contents:

- 1 Shade structure
- 2 Jointed cantilever
(cf page 5 "Fixing system")


Locate a suitable and safe spot to place your parasol, making sure you keep it away from open flames. If the parasol is installed on terraces, make sure that the canopy does not protrude from the railing (A).

The wall must be solid and suitable for fixing the threaded rods or dowels (cf "Fixing system" on page 5) and must allow the cantilever to be positioned horizontally (B); once the appropriate location for the parasol has been identified, proceed to attach the plate to the wall (1). To secure the threaded rods or dowels, Teknowind recommends contacting specialized personnel.


Insert the tube of the shade structure (1) into the plug tube (2) and secure it with the stainless steel ring. Your Teknowind Zephiro wall-mounted parasol is now ready to be opened using the appropriate cord.

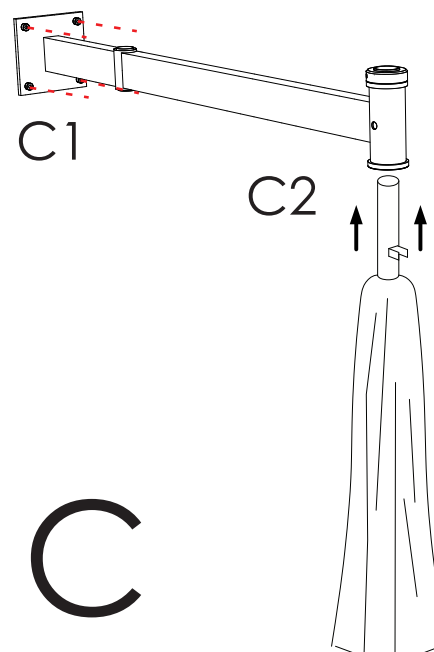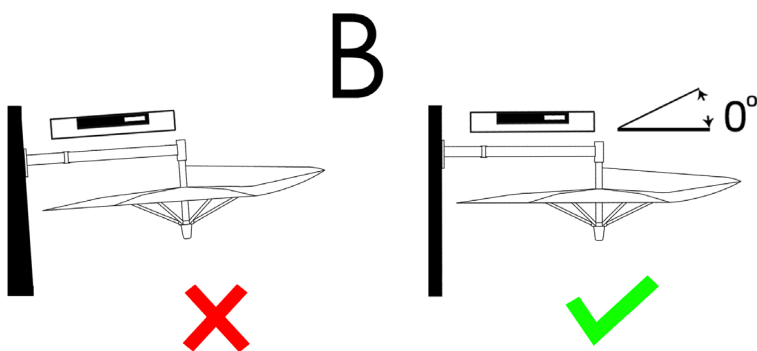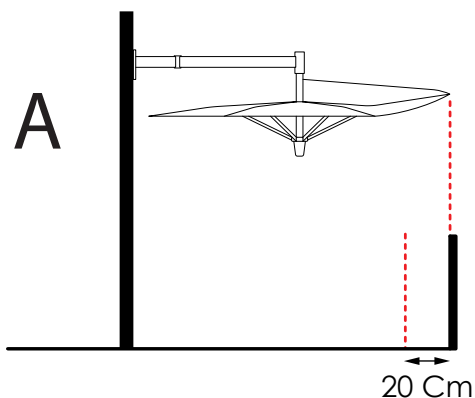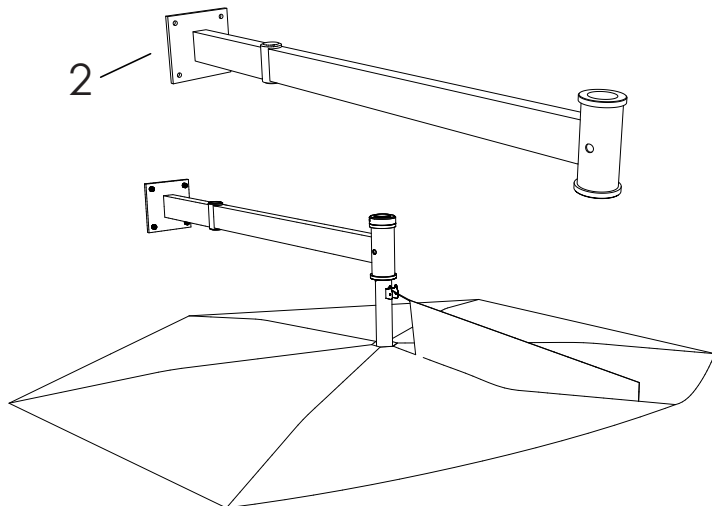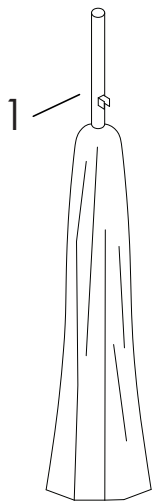

Remember that once the parasol has been opened, the sail drawstring must be pulled to activate the windproof system.




Pull down the drawstring to activate the patented Teknowind windproof system.






Lock the drawstring into position by inserting the ring into the appropriate slot.

C

INSTRUCTIONS FOR DISASSEMBLING THE CANOPY:

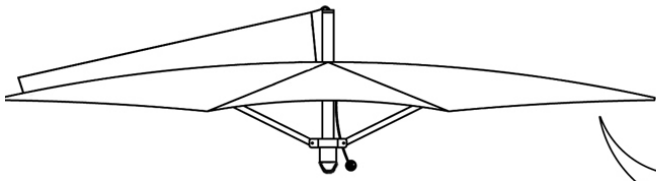


Detach the Velcro straps present along the slats of the spans.

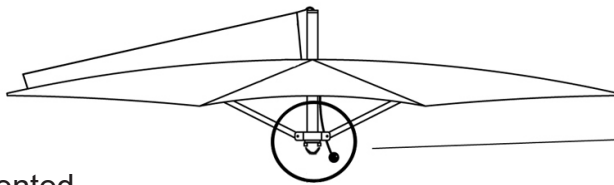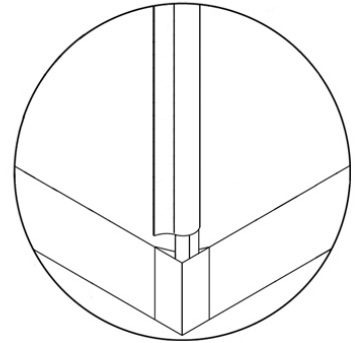
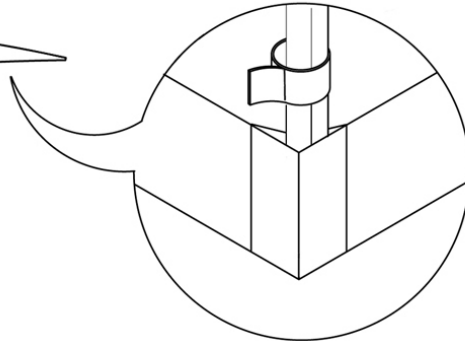


Deactivate the patented TEKNOWIND windproof system by releasing the drawstring and close the parasol by pressing the appropriate buttons.



Closing buttons

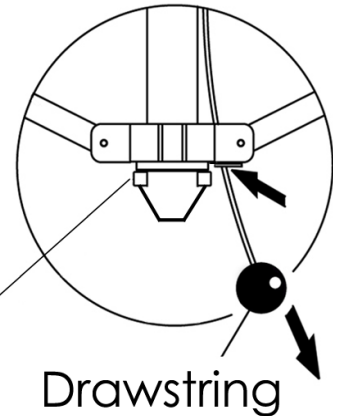

Drawstring

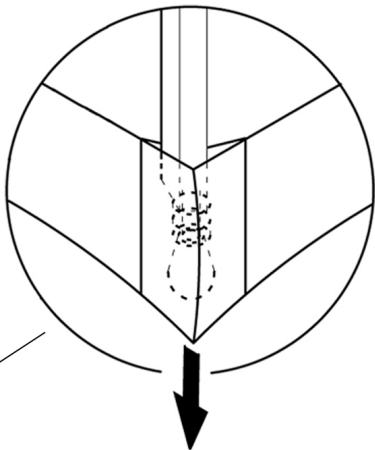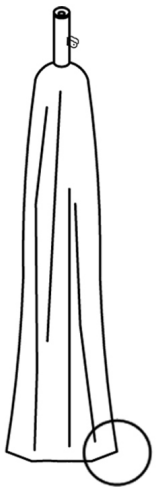

Pull the corners of the canopy down and pull the frame tips out of the holding pockets of the canopy.

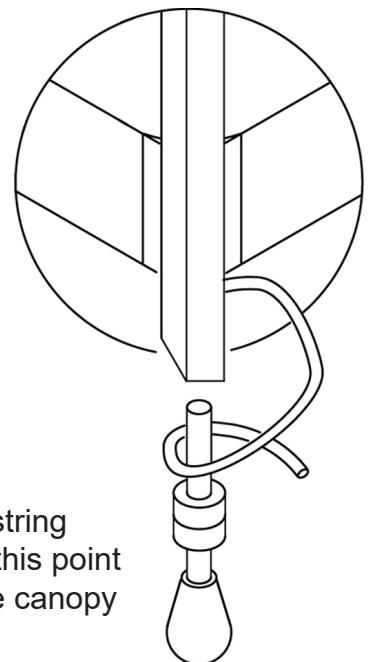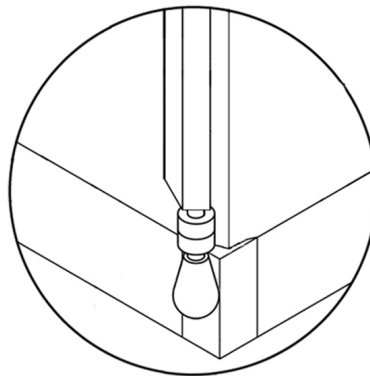

Untie the knot in the drawstring found on the sail span; at this point it is possible to remove the canopy from the structure.

WARNINGS:

Before starting the opening procedure, make sure that the canopy of the parasol is not caught in the inner slats. To open or close parasols raise or lower the hub manually: improper handling can break the mechanism.

If the model has been equipped with pulley's opening system, never force the ropes, if there is a blockage, ascertain its origin and then remove the possible cause.

100% DOLAN® paste-dyed acrylic fiber: for washing and maintenance see directions in the "CANOPY" system. During the winter season it is recommended that the canopy be removed from the structure and stored completely dry.

Mechanical parts: treat with Vaseline oil once each year before winter. Close the parasols during bad weather conditions such as wind over 80 km/h, heavy rain, hail or snow.

Teknowind parasols are equipped with specific bases that allow them to be anchored. If you choose to position them only by ballast you certify their suitability for normal use in wind conditions not exceeding 70 Km/h.

The fixing stage of the parasol and its handling are the sole responsibility of the customer unless specifically requested during the purchasing process.

WARRANTY:

Products in the Teknowind line are warranted for two years against structural defects not due to misuse or lack of maintenance and against invasive oxidation not resulting from scratches or abrasions from use and not removable by normal cleaning and maintenance.

Small irregularities on the surface of the product are characteristic of the particular painting technique used and in no way affect the inherent protective quality of the product itself. Should you intend to make use of the warranty, you must present the defective item and the purchase invoice to the retailer. Teknowind s.r.l. disclaims all liability for damage caused to property or persons resulting from improper use of the product.

CONTACTS:

TEKNOWIND S.R.L. - Via Vitale Rosi, 42 - 06038 Spello (PG) - Italy - Share capital € 10.000,00
VAT Number IT 03313040549 - Tel. +39 0742 651941 +39 0742 301524 - Fax +39 0742 301435
commerciale@teknowind.com info@teknowind.com www.teknowind.it





via Vitale Rosi 42, 06038 – Spello PG Italy
VAT 03313040549
Tel: + 39 0742 30152 Fax: + 39 0742 301435
Email: info@teknowind.it
